SubliJet IQ

PowerDriver™ IQ®
EPSON WORKFORCE PRO
WP-4015 DN

SUBLIJET IQ COLOR MANAGEMENT DRIVER FOR THE EPSON WORKFORCE PRO WP-4015 DN

USER'S MANUAL

Windows XP, Vista & 7

SAWGRASS™ CONSUMER

v20130430

SubliJet IQ

Epson WorkForce Pro WP-4015 DN

PowerDriver User's Manual

PowerDriver is equipped with a user-friendly software interface that allows individuals to access and customise driver configuration settings for optimal printing performance. As an added bonus, PowerDriver is also outfitted with several resource and utility features to bring additional help and support for customers looking to bolster their printing experience. Through these powerful features, users are able to gain complete control over their image quality, colour output and print options.

1. To view the PowerDriver configuration settings, click your start icon and select Devices and Printers (see FIGURE 1). If you are using an older version of Windows OS, you will instead select Printers and Faxes.

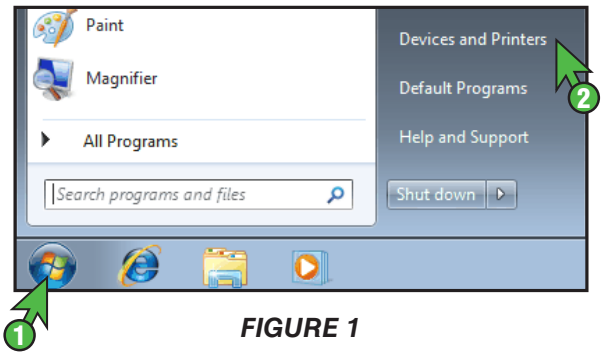

FIGURE 1

2.) In the Devices and Printers folder, right-click on the PowerDriver WP4015DN icon and select Printing Preferences (see FIGURE 2). This will open the PowerDriver Printing Preferences window (see FIGURE 3).

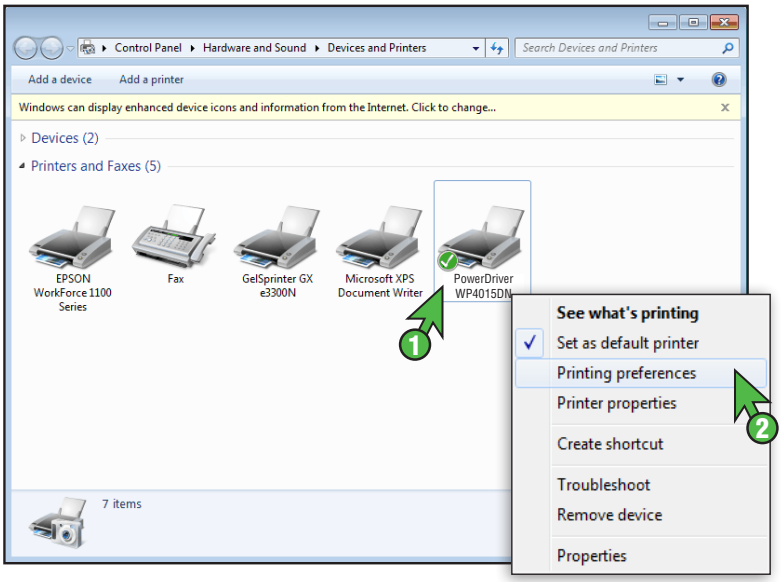

FIGURE 2

3. With the PowerDriver WP4015DN Printing Preference window open, click the **Virtual Printer Driver** tab. Here you will find five different **SECTIONS** to utilise: (see FIGURE 3)

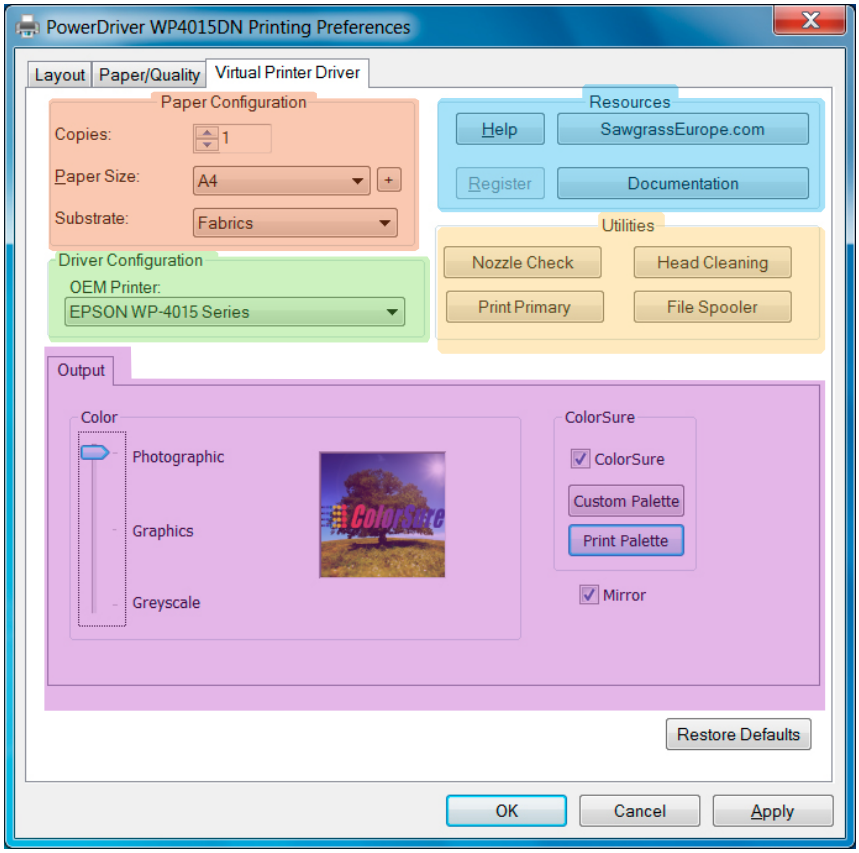

FIGURE 3

SECTION 1 Paper Configuration — Choose Paper Size and Type, Copies and Substrate

SECTION 2 Driver Configuration — Select OEM printer intended for use

SECTION 3 Output — Adjust Color, Create Palette and Mirror Image

SECTION 4 Resources — Access Documentation, Help and Online Support

SECTION 5 Utilities — Access Resources intended for Printer Maintenance

SECTION 1

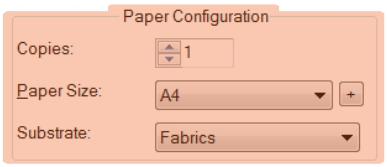

Copies Sets the number of prints needed per image. Use this feature when multiple prints of the same image are needed.

Paper Size Sets the desired output paper size used in the printer. Adjust this to match the size of the transfer paper in the paper tray.

Substrate Sets the desired substrate being used. Match this to the type of material on to which you will be transferring your printed image. Because PowerDriver's colour management is optimised for each substrate listed, it is important to choose the substrate that most closely matches the substrate being used.

SECTION 2

OEM Sets the OEM printer intended for use with PowerDriver. This feature is particularly useful when printing to multiple printers of the same ink set or multiple printers that require multiple drivers. For instance, if you have two WP4015DN's and one is for printing ChromaBlast while the other is for printing SubliJet-IQ, you are able to set the printer loaded with SubliJet-IQ as the default printer in the PowerDriver or vice versa. On the other hand, if you have two WP4015DN's and both are for printing with SubliJet-IQ, you can choose between each printer per print job.

SECTION 3

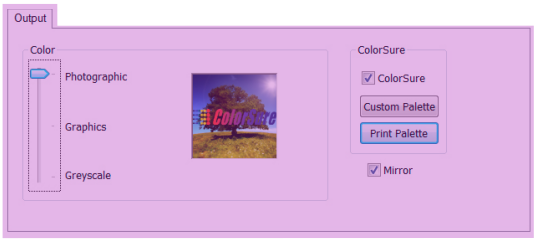

Photographic This setting is intended as a photographic colour management solution. It is most suitable for photographic images containing landscapes or portraits, it produces natural / realistic results

Graphics This setting is intended as a business graphics colour management solution. It is most suitable for business logos and designs that require a more vivid colour output.

Grayscale This setting is intended for printing monochromatic or black and white images. It allows you to print images using varying shades of grey only.

Mirror Check this box to "flip" or reverse your image. The image becomes reversed when transferring from paper to substrate. Therefore, you will need to "flip" or reverse the image before printing to paper.

ColorSure Check this box if you want to use the ColorSure colour palette. ColorSure is a method for reproducing exact spot colours. By picking colours from the ColorSure Palette, you will be able to consistently reproduce colours in a reliable manner.

Custom Palette Here you can add your own unique colours to the ColorSure palette. ColorSure must be checked in Color Options in order to use this feature.

Print Palette Click here to print the default ColorSure Palette. This feature allows you to see how colours will look once transferred to your desired substrate. Before you print the ColorSure Palette, be sure to choose the paper size, paper type and substrate that most closely resemble those which you are using. The default ColorSure Palette will also contain custom colours once you have added and saved them using the Custom Palette utility.

SECTION 4

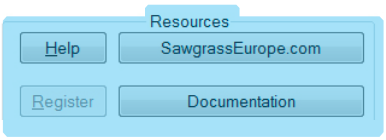

Help Click here to access general information about PowerDriver. The help dialog menu also contains a direct links to our website, where you can find the latest driver updates, literature and educational resources offered by Sawgrass Europe.

Documentation Click here to view and/or download the latest documentation which will guide you through the installation, registration and setup of your printer, driver and software.

Register Click here to register your product. Registration is required to unlock all product features and functions that PowerDriver has to offer. You must register PowerDriver for every PC on which it is installed.

SawgrassEurope.com Click here to access the Sawgrass Europe website. You will find the absolute latest information and updates on all products, materials, processes, and/or procedures relative to all offerings by or through Sawgrass Europe.

SECTION 5

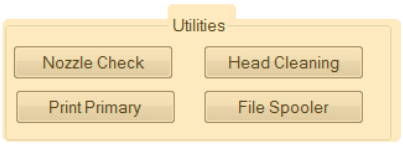

Nozzle check Click here to print a test pattern to check nozzle condition. If any of the nozzle patterns are missing or incomplete, then a head cleaning is required.

Head Cleaning Click here to initiate the head cleaning process. This feature is necessary when nozzles are missing thus causing colour shift or "banding" in your printed images. You should print a nozzle check to confirm missing nozzles before performing a head cleaning. Repeat the Head Cleaning until a complete nozzle check has been achieved. Cartridge users should only perform two (2) head cleanings, while users of bulk ink systems can try up to five (5). Contact technical support if you fail to achieve a good / complete nozzle check after the recommended amount of cleanings.

Print Primary Click here to print a primary ink chart. This chart contains a series of blocks which represent each ink channel on the print head. It can be useful when attempting to troubleshoot or trying to clear clogged nozzles.

File Spooler Click here to launch the File Spooler Utility. This feature is solely intended for advanced users and technical support for troubleshooting. It allows you to print jobs that were previously processed and saved to disk as text files or print ready files, also known as PRN files.

4. At the top of the PowerDriver WP4015DN Printing Preference window, click the **Layout** tab. Here you will find four different **SECTIONS** to utilise: (see *FIGURE 4*)

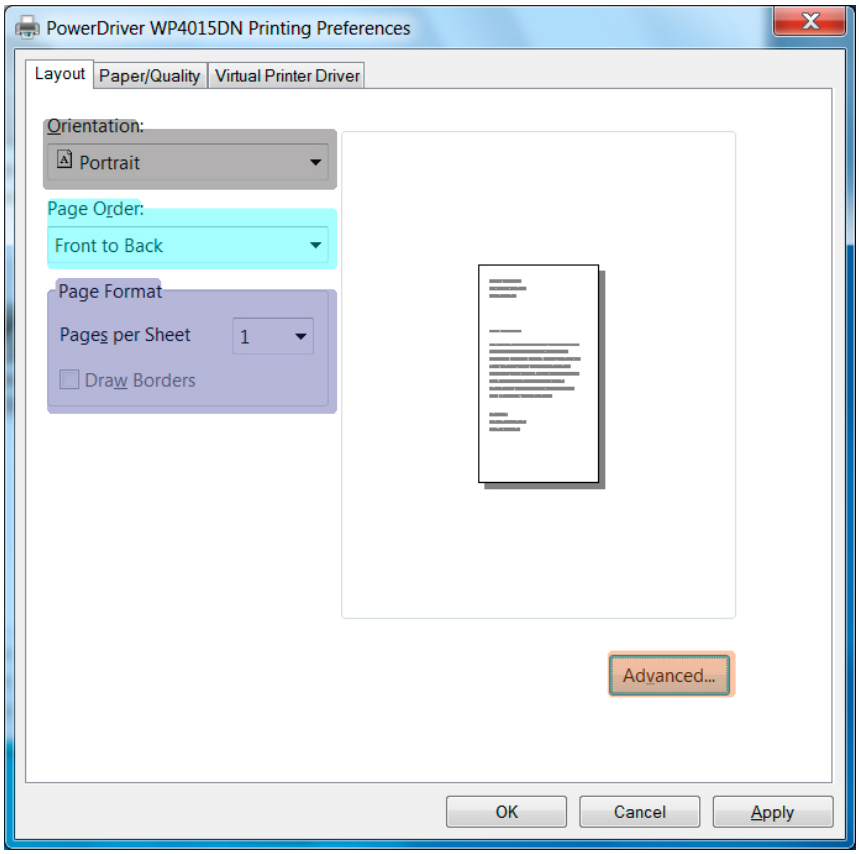

FIGURE 4

SECTION 6 Orientation — Choose the direction in which an image is printed

SECTION 7 Page Order — Sets the chronological order when printing images

SECTION 8 Page Format — Adjust the number of pages per sheet

SECTION 9 Advanced… — Access the current Document Settings

SECTION 6

Portrait With this selection the page height is longer than the width. In other words, the image is printed vertically from top to bottom.

Landscape With this selection the page width is longer than the height. In other words, the image is printed horizontally from left to right.

SECTION 7



Front to Back Using this setting will print the first image first and the last image last. For instance, if 4 different images are printed at the same time, they will print in the following order: 1, 2, 3 and 4.

Back to Front Using this setting will print the last image first and the first image last. For instance, if 4 different images are printed at the same time, they will print in the following order: 4, 3, 2 and 1.

SECTION 8

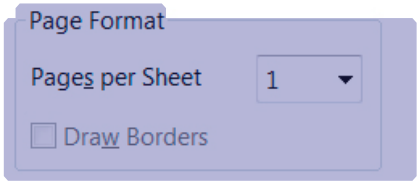

Pages per Sheet Allows you to fit multiple pages on a single sheet of paper. The default value 1 should be used when printing one image/page per sheet.

Draw Borders Prints frames around the pages printed on each sheet.

SECTION 9



Document Settings Click here for an overview of the default advanced document settings. These settings have been specifically engineered per printer platform and should not be adjusted by the end user.

5. At the top of the PowerDriver WP4015DN Printing Preference window, click the **Paper/Quality** tab. Here you will find three different **SECTIONS** to utilise: (see *FIGURE 5*)

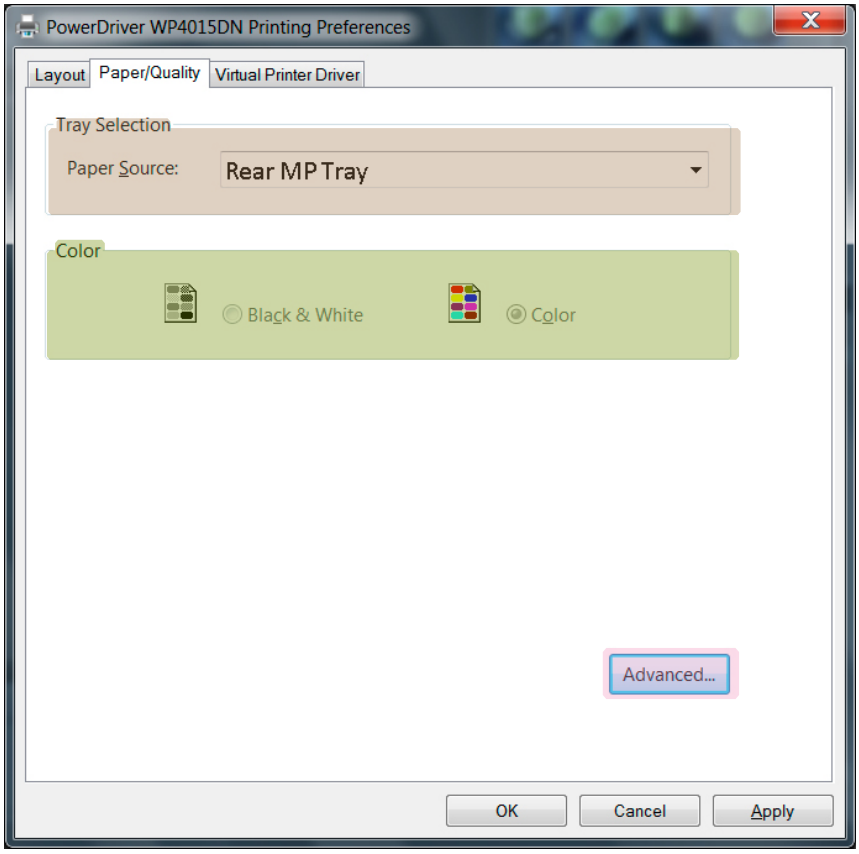

FIGURE 5

SECTION 10 Tray Selection — Allows you to select the printer's paper source

SECTION 11 Color — This default is locked and controlled by PowerDriver

SECTION 12 Advanced… — Access the current Document Settings

SECTION 10



Rear MP Tray This setting should be used as your paper source. It is recommended to use this as your default paper source.

SECTION 11

Black & White This setting has been specifically engineered per printer platform and should not be adjusted by the end user.

Color This setting has been specifically engineered per printer platform and should not be adjusted by the end user.

SECTION 12

Document Settings Click here for an overview of the default advanced document settings. These settings have been specifically engineered per printer platform and should not be adjusted by the end user.